


MODEL: GT-BS06B

Oder Code	GT-BS06B
LED	10W/Pcs Osram
Row	Single Row
Operating Voltage	10-30V DC
Operating Temp	-40~+80 °Celcius
Beam Pattern	Flood, Spot, Combo
Color Temperature	5700K
Lifetime	30000+h
Lens Material	Polycarbonate
Housing Material	Aluminum
Coating Powder	Semi Gloss Black
Mounting System	304 Stainless Steel SideMount Aluminum Bottom Mount
Pressure Equalization Vent	Yes
Waterproof Rate	Ip67
EMC Protection	CISPR 25 Class 3

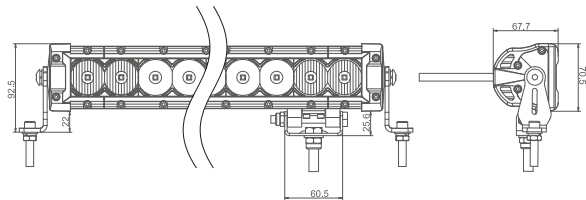

MODEL	Size	Watt	AMP Draw	Leds	Theoretical Lumen	Cable Length	Net Weight	Package Standard
GT-BS06B-2L	4.70"	20W	1.16A@12V, 0.58A@24V	2PCS*10W Osram	9502Lm	400mm	0.58Kg/Pcs	8Pcs/Carton
GT-BS06B-6L	10.23"	60W	3.50A@12V, 1.75A@24V	4PCS*10W Osram	5700Lm	400mm	1.10Kg/Pcs	8Pcs/Carton
GT-BS06B-8L	12.99"	80W	4.67A@12V, 2.33A@24V	8PCS*10W Osram	7600Lm	800mm	1.35Kg/Pcs	6Pcs/Carton
GT-BS06B-12L	18.56"	120W	7.00A@12V, 3.50A@24V	12PCS*10W Osram	11400Lm	800mm	1.79Kg/Pcs	4Pcs/Carton
GT-BS06B-16L	24.11"	160W	9.33A@12V, 4.67A@24V	16PCS*10W Osram	15200Lm	800mm	2.28Kg/Pcs	4Pcs/Carton
GT-BS06B-20L	29.66"	200W	11.67A@12V, 5.83A@24V	20PCS*10W Osram	19000Lm	800mm	2.77Kg/Pcs	2Pcs/Carton
GT-BS06B-24L	35.21"	240W	14.00A@12V, 7.00A@24V	24PCS*10W Osram	22800Lm	800mm	3.23Kg/Pcs	2Pcs/Carton
GT-BS06B-26L	37.99"	260W	15.17A@12V, 7.58A@24V	26PCS*10W Osram	24700Lm	800mm	3.50Kg/Pcs	2Pcs/Carton